


# Interpon HT : Heat Resistant Powder Coatings



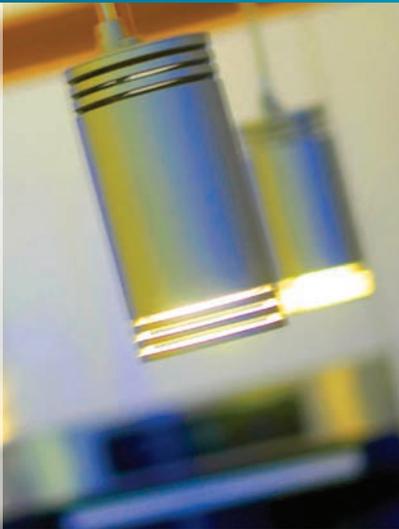

# Interpon HT

Heat Resistant and  
High Heat Powder Coatings

Committed to Research and Development to offer customers a wider choice of powder coatings and recognising the increasing demands on applicators worldwide for environmental compliance, AkzoNobel has extended its range of powder coatings with heat resistant properties.

**Interpon HT** powder coatings are competitive with many established liquid coatings for even the most demanding applications where heat resistance is required.



## Taking Powder Coating to the Extremes

**Interpon HT** is a range of powder coatings developed for applications that require heat resistance properties ranging from 200°C (392°F) to the extreme high heat temperatures of 550°C (1022°F).

## Typical Coatings Benefits

- Gloss and color stability
- Resistance to delamination
- Resistance to cracking
- Excellent corrosion resistance
- Environmentally friendly
- Higher scratch resistance (vs liquid)

## Main Markets

Recommended for all markets with metallic parts submitted to a prolonged heat from 200°C (392°F) to 500°C (932°F) such as:

- Hearth products, wood and pellet burning stoves, fireplace inserts
- Exhaust systems (i.e. stove exhaust pipes)
- Barbecues
- Lighting fixtures
- Mufflers for generators, motorcycles and tractors





## High Heat Powder Coatings

Pieces exposure	Temperature Range	Gloss / Colors	Main Technical Properties	Typical End-Uses
<b>Interpon HT 350</b>	250 - 350°C (482 - 662°F) depending on the products	Smooth, satin, matt, fine texture, colors, metallics	Gloss stability / yellowing resistance after heat exposure	Boilers, stoves, fireplaces and BBQs surrounds
<b>Interpon HT 450</b>	350 - 450°C (662 - 842°F) depending on the products	Fine texture, blacks, grays, chrome, metallics	Good outdoor resistance	Exhaust pipes, stoves, chimney flues, BBQs
<b>Interpon HT 550</b>	450 - 550°C (842 - 1022°F) depending on the products	Fine texture, blacks, dark grays	Corrosion protection before and after heat exposure. Good outdoor resistance	Mufflers, chimney flues, body and inside parts of stoves

*Refer to the relevant product data sheet for more information.*



### Substrate Pre-treatment

Proper substrate pre-treatment is critical to the performance of high service temperature products. Pre-treatment may vary with substrate type and application.

All oil and grease, as well as scale, rust and dirt must be removed before powder spraying. For some applications a grit blast may be adequate.


### Substrates

**Interpon HT** products can be developed for various substrates:

- Steel
- Cast iron
- Aluminum
- Cast aluminum
- Aluminized steel

Correct product choice is very important and our technical sales personnel, in association with our technical teams, will provide advice and assistance.

For more information speak to your local representative or visit [www.interpon.com](http://www.interpon.com)

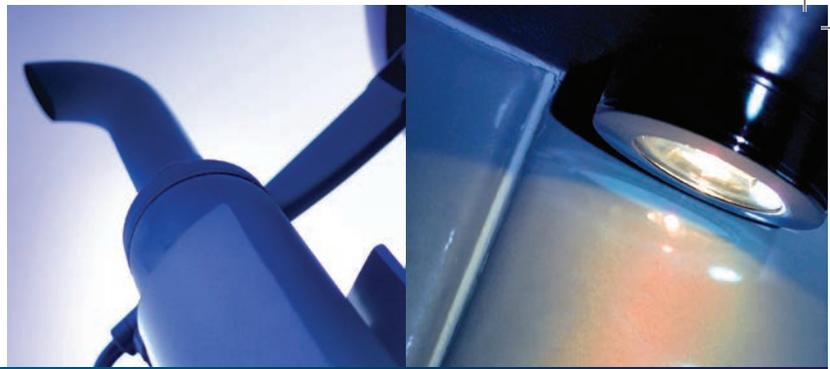

Argentina  
Tel: +54 (11) 48590060

Australia  
Tel: +61 (0) 3 9313 4555

Baltics  
(Latvia, Lithuania, Estonia)  
Tel: +371 293 75577

Benelux  
Tel: +32 (0) 2 254 77 51

Brazil  
Tel: +55 (0) 11 2184 9700

Chile  
Tel: +56 2 544 84 52

China (Suzhou)  
Tel: +86 (0) 512 6825 7828

China (Ningbo)  
Tel: +86 574 5608 1446

China (Langfang)  
Tel: +86 (0) 316 5919 519

China (Shanghai)  
Tel: +86 (0) 21 2220 5000

China (Shenzhen)  
Tel: +86 (0) 755 2714 8450

China (Chengdu)  
Tel: +86 (0) 288 4847 422

China (Wuhan)  
Tel: +86 (0) 27 8425 7277

Colombia  
Tel: +57 (4) 361-8888 Ext.140

Czech Republic  
Tel: +420 553 692 275

Denmark  
Tel: +45 44 66 44 44

Egypt  
Tel: +20 (0) 2 38 33 1415

Finland  
Tel: +358 (0) 10 8419 596

France  
Tel: +33 160 81 81 81

Germany (Arnsberg)  
Tel: +49 (0) 2932 6299 0

Germany (Reutlingen)  
Tel: +49 (0) 7121 5190

Greece  
Tel: +30 210 8160 160

Hungary  
Tel: +36 1 348 06 46

India  
Tel: +91 (0) 802 289 5000

Indonesia  
Tel: +62 (0) 21 893 4270

Italy (Como)  
Tel: +39 031 345 111

Italy (Romano)  
Tel: +39 0424 838 838

Japan  
Tel: +81 (0) 3 5216 2353

Malaysia  
Tel: +60 7 254 1102

Mexico  
Tel: +52 (818) 374 3244

Morocco  
Tel: +212 (0) 522 67 87 67

New Zealand  
Tel: +64 (0) 9 828 3009

Norway  
Tel: +47 66 819 500

Poland  
Tel: +48 12 651 81 91

Portugal  
Tel: +35 2121 99100

Romania  
Tel: +40 21 3232 314

Russia  
Tel: +7 495 411 7350

Singapore  
Tel: +65 66 355100

Slovak Republic  
Tel: +421 415 640612

South Africa  
Tel: +27 (0) 11 907 8195

South Korea  
Tel: +82 (0) 31432 1100

Spain  
Tel: +34 (9) 3 680 6900

Sweden  
Tel: +46 (0) 31 928 500

Taiwan  
Tel: +886 (0) 2 2603 5700

Thailand  
Tel: +662 706 1900

Tunisia  
Tel: +216 71 434 700

Turkey  
Tel: +90 232 355 1800

United Arab Emirates  
Tel: +971 4886 2181

United Kingdom  
Tel: +44 (0) 121 555 1500

United States (Nashville)  
Tel: +1 615 259 2430

United States (Reading)  
Tel: +1 610 685 7600

United States (Warsaw)  
Tel: +1 574 372 2000

United States (Flying Hills R&D)  
Tel: +1 610 775 6640

Vietnam  
Tel: +84 35 60730 Ext:203



Follow AkzoNobel Powder Coatings on Facebook

**Interpon**<sup>®</sup>  
powder coatings  
**EVERY COLOR IS GREEN**

All products supplied & technical advice given are subject to the standard terms of sale of the AkzoNobel supplying company. Copyright ©2013 Akzo Nobel Powder Coatings Ltd. Interpon is a registered trademark of AkzoNobel. (Issue 3 - 3/2013). Printed in the UK.